

Pioneer Nano™

5YR 12 24 IP67




Download **Pioneer™ Designer** for a list of available options. whelen.com/eng_apps



- 8° spotlight pattern comes standard. Includes additional optic lens for a light pattern choice of:
 - 40° x 20° flood
- Optic lens changes easily via removable lens retainer
- Injection molded polycarbonate lenses are impact resistant and hard-coated
- Die-cast aluminum powder-coated housing in Black or White
- Solid-state electronics
- LEDs are instant On/Off, eliminating ramp up time and high current inrush
- Correlated Color Temperature (CCT) of 5,700° kelvin simulates bright midday light
- Includes 72" cable
- Powder-coated stainless steel bail bracket with 0.375" stud carriage bolt mount
- Consult current price list for available options

MODEL	DESCRIPTION	LUMENS*
NP3BW	3-LED, bail mount, White housing	1,566
NP3BB	3-LED, bail mount, Black housing	1,566
NP6BW	6-LED, bail mount, White housing	2,552
NP6BB	6-LED, bail mount, Black housing	2,552

*Total design lumens produced at time of publication. LED flux BINS periodically increase due to evolution of LED technology. Whelen reserves the right to increase lumen output when higher Flux BINS are available.

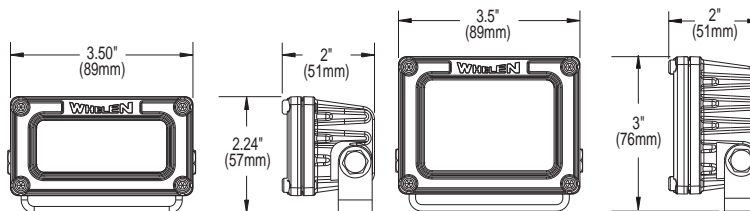

⚠ WARNING: These products may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit whelen.com/regulatory.

