



8-Light Split

TRAFFIC ADVISOR™

The 8-Light Split Traffic Advisor features a split bar design with a 75' (22.86m) cable, providing greater mounting flexibility for various vehicles and applications. Built for durability and performance, it has a tough extruded aluminum housing and is fully encapsulated for maximum protection against the elements. This adaptable lightbar is suitable for exterior applications, making it ideal for emergency, utility, and maintenance vehicles.



TAL85S75 with TACTL5 (included)

FEATURES

- Suitable for exterior applications
- Features TA Left, TA Right, TA Split, and warning function for enhanced signaling
- Fully encapsulated to withstand harsh environments and ensure reliable performance
- Hard-coated lenses resist environmental damage from sand, sun, salt, and road chemicals

- Extruded aluminum housing
- TACTL5 control head included
- 6 flash pattern sequences
- 500 Series 5mm LED lighthead
- 75' (22.86m) cable included
- Surface mounting

SPECS

Voltage: 12 VDC
 Amps: 0.48 (peak) per lighthead
 Dimensions: 23.49" (59.66cm) L x 2.84" (7.21cm) H x 2.24" (5.68cm) W
 Certifications: SAE Class 1
 Warranty: 5-year

MODELS

TAL85S75	8-Light Split Traffic Advisor
----------	-------------------------------



Please contact your Whelen sales representative with questions on vehicle-specific options.



Angled



Extruded Aluminum Housing

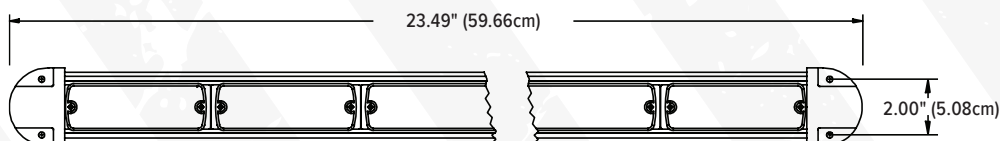

⚠ WARNING: This product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit whelen.com/regulatory.

All products proudly designed, manufactured, and assembled in the U.S.A.
 • ISO 9001 Registered QMS

Whelen Engineering reserves the right to upgrade and improve products without notice.
 © 2025 Whelen Engineering Company, Inc. Printed in U.S.A.
 Code No. P13588A - 07/25

WHELEN
 MANUFACTURED IN AMERICA

51 Winthrop Road
 Chester, Connecticut 06412-0684
 (860) 526-9504
www.whelen.com

WHELEN ENGINEERING COMPANY, INC.